



12-406

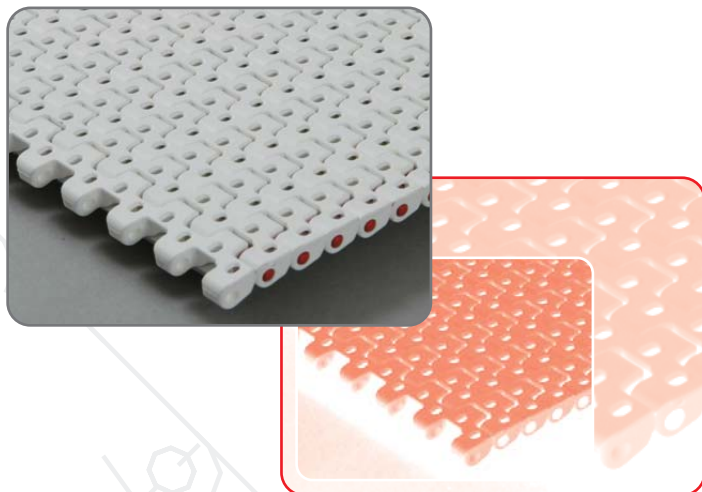

Belt surface: Open belt with a smooth surface.
Open area: 8%. Biggest opening 4x2.5 mm
Strength: Ideal choice for light transportation.
Material/colour: PE/nat, PP/white and grey. POM/blue/nut.
Cleanability: Excellen FSIS
Application: Cooling belt for small nose bar/transfer
Width interval: 10mm. e.g.:100 mm, 110 mm, 120 mm etc.

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	600	4.5
Polypropylene (PP)	800	4.5
Polyacetal (POM)	1450	6

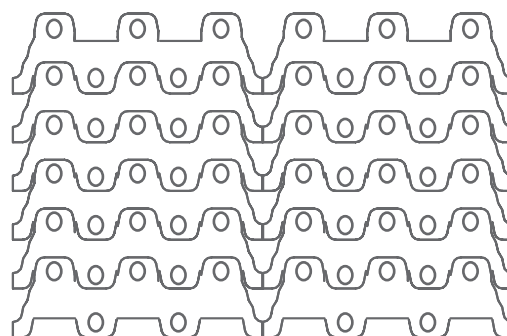

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
10	50	42	33
19	84	76	67
24	104	96	87
28	120	112	103

HUB SPECIFICATION

Hub width 16 mm	Number of teeth			
	10Z	19Z	24Z	28Z
Round bore (mm)	10	20	20	20
	20	25	25	25
		30	30	30
		40	40	40
Square bore (mm)	25x25	25x25	25x25	25x25
	40x40	40x40	40x40	40x40

