



# 12-408

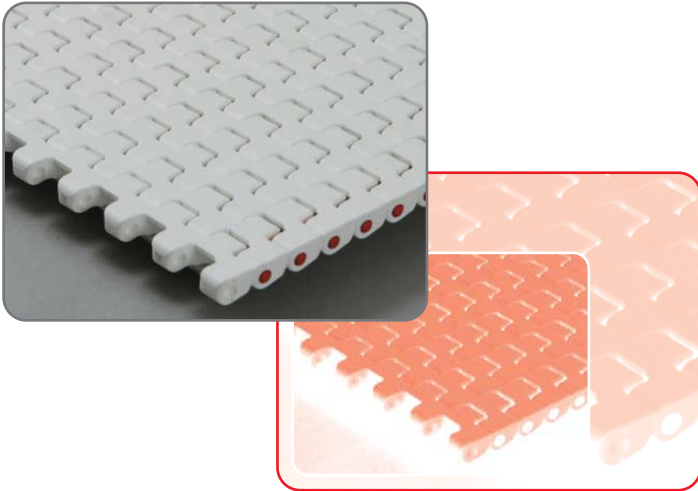

Belt surface: Close belt with a smooth surface.  
 Open area: 0%  
 Strength: Ideal choice for light transportation.  
 Material/colour: PE/nat, PP/white and grey. POM/blue/nut.  
 Cleanability: Excellen FSIS  
 Application: Cooling belt for small nose bar/transfer  
 Width interval: 10mm. e.g.:100 mm, 110 mm, 120 mm etc.

**BELT DATA**

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	600	4.5
Polypropylene (PP)	800	4.5
Polyacetal (POM)	1450	6

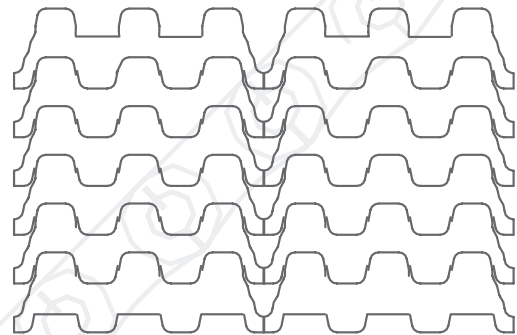

**SPROCKET DATA**

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
10	50	42	33
19	84	76	67
24	104	96	87
28	120	112	103

**HUB SPECIFICATION**

Hub width 16 mm	Number of teeth			
	10Z	19Z	24Z	28Z
Round bore (mm)	10	20	20	20
Square bore (mm)	20	25	25	25
		30	30	30
		40	40	40
		25x25	25x25	25x25
	40x40	40x40	40x40	

