


GB-103

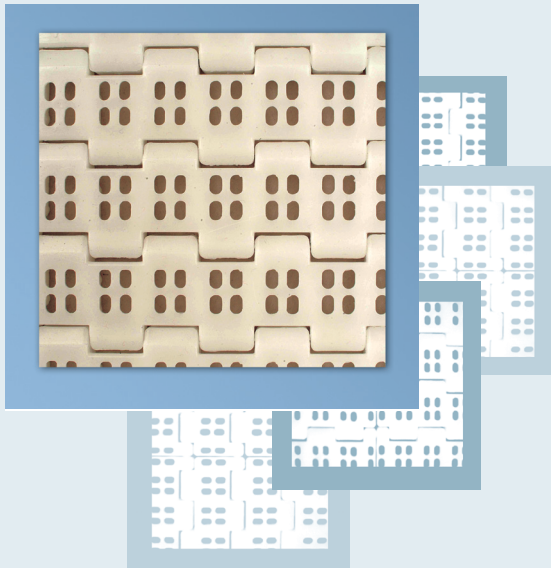


Belt Surface: Perforated
Open Area: 15%
Strength: Medium & heavy application
Material/Colour: POM/White, Green with
 Stainless steel wire 304/316
Cleanability: Good
Accessories: 40 mm flights
Application: Packaging, fruit & vegetables,
 washing
Width interval: 33 mm

Standard measure of the belt

- 88
- 120
- 153
- 186
- 219
- 252
- 285
- 318
- 351
- 384
- 417
- 450
- 483
- 516
- 549
- 582
- 615
- 648
- 681
- 714
- 747
- 765
- 798
- 810
- 846
- 879
- 912
- 945
- 978
- 1011
- 1044
- 1077
- 1110
- 1143
- 1176
- 1209
- 1242
- 1275
- 1308
- 1341
- 1374
- 1407
- 1440
- 1473
- 1506
- 1539
- 1572
- 1605
- 1638
- 1671
- 1704
- 1737
- 1770
- 1803
- 1838
- 1863
- 1992
- 1935
- 1968
- 2001
- 2034
- 2067
- 2100
- 2133

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyacetal (POM)	3000	7.6

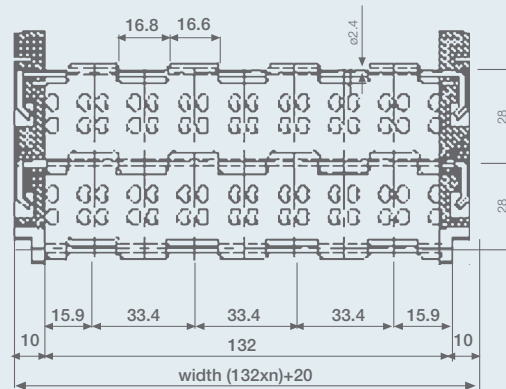

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
12	122.5	109.4	99.8
18	172.7	159.6	150

HUB SPECIFICATION

Hub width 16 mm	Number of teeth	
	12Z	18Z
Round bore (mm)	20	30
	25	35
	30	40
	35	45
		50
		55
	60	

