



# 25-400

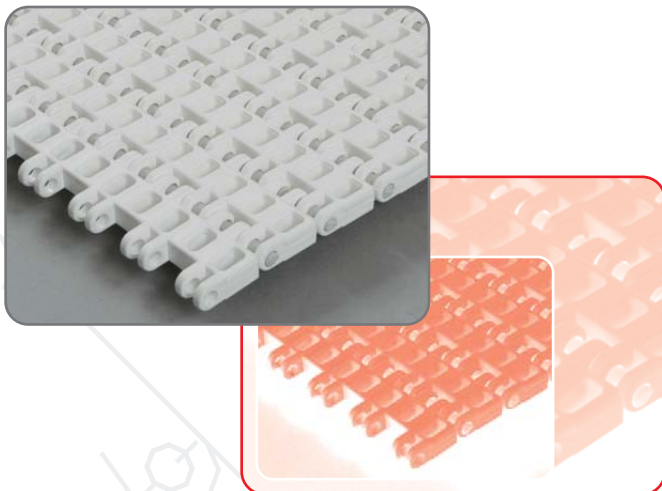

- Belt surface: Open belt with a smooth surface.
- Open area: 29%. Biggest opening 6 x 10 mm.
- Strength: Ideal for medium weight transportation.
- Material/colour: PE/nat, PP/white and grey. POM/blue.
- Cleanability: Excellent. FSIS
- Accessories: 3, 25 and 50 mm flights. 25 and 50 mm sideguards. The 3, 25 and 50 mm flights and standard modules can be supplied in a special high-friction material.
- Application: Seafood, red meat, vegetables, bakery and foodindustry in general. Even cooling/freezing and washing.
- Width interval: 12,5 mm. e.g. 100 mm, 112,5 mm, 125 mm etc.

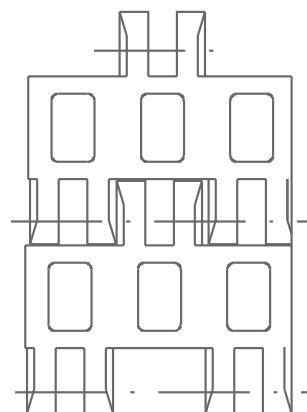

### BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	630	5
Polypropylene (PP)	1060	5
Polyacetal (POM)	1500	7

### SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	54	45	36
8	70	61	52
12	104	95	86
20	169	160	151

### HUB SPECIFICATION

Hub width 16 mm	Number of teeth			
	6Z	8Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø	20ø 25ø 30ø 40ø	25ø 30ø 40ø
	Hexagon bore (mm)	24x24x24		
	Square bore (mm)	25x25	25x25 40x40	25x25 40x40 60x60

