


25-806

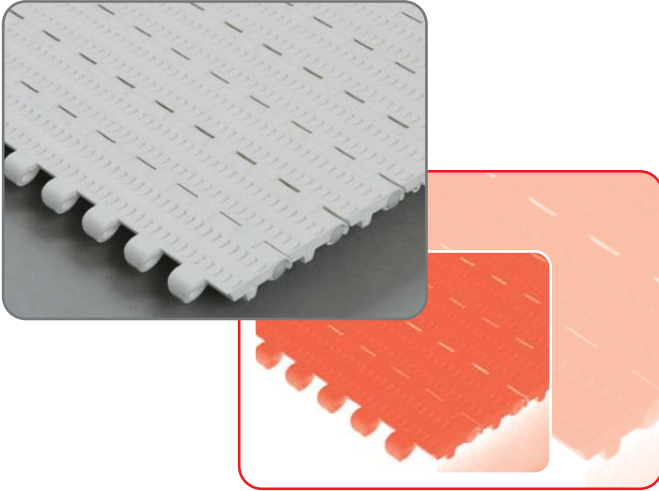


- Belt surface:** Perforated flat top.
- Open area:** 17%. Biggest opening 2 x 5 mm.
- Strength:** An ideal choice for light transportation.
- Material/colour:** PE/nat, PP/white and grey. POM/blue.
- Cleanability:** Excellent. FSIS
- Accessories:** 3, 25 and 50 mm flights.
25 and 50 mm side guards.
- Application:** Seafood, dairy, vegetables, poultry, snacks, sweet goods...
- Width interval:** 10 mm. e.g. 100 mm, 110 mm, 120 mm etc.

EASY TO CLEAN

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	550	5.5
Polypropylene (PP)	650	5.5
Polyacetal (POM)	1050	8

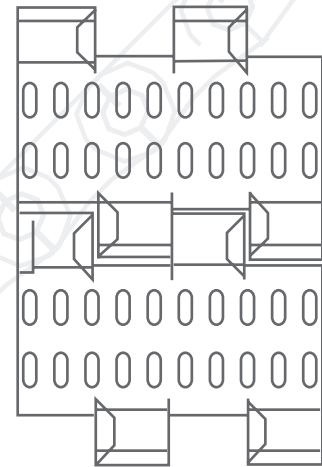

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	59	50	41
12	106	97	88
20	170	161	152

HUB SPECIFICATION

Hub width 16 mm	Number of teeth		
	6Z	12Z	20Z
Round bore (mm)	20ø	25ø	25ø
		30ø	30ø
		40ø	40ø
Square bore (mm)		40x40	
		40x40	60x60

