


50-800

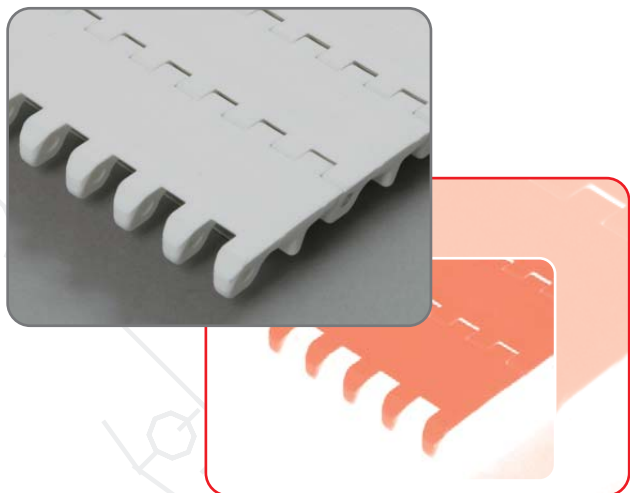


Belt surface: Flat top.
Open area: Closed.
Strength: The right belt for medium-heavy transportation.
Material/colour: PE/nat, PP/white and grey. POM/blue.
Cleanability: Excellent. FSIS
Accessories: 25, 50 and 75 mm flights. 50, 75, 100 and 150 mm side guards. Hold-down. Extended and bent flights. Flights fitted with a round top.
Application: Red meat, seafood, poultry, dairy and vegetable industries and trimming lines in general.
Width interval: 20 mm. e.g. 100 mm, 120 mm, 140 mm etc.

EASY TO CLEAN

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1200	8
Polypropylene (PP)	1400	8
Polyacetal (POM)	2100	12

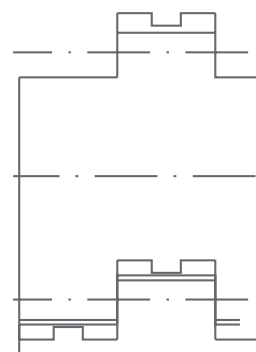

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	115	101	85
8	147	133	117
10	178	164	148
12	209	195	179

16Z is only available without guides.

HUB SPECIFICATION

Hub width 40 mm	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	25ø	25ø		
	30ø	30ø	30ø	30ø
	40ø	40ø	40ø	40ø
Square bore (mm)			50ø	50ø
			60ø	60ø
			80ø	80ø
	38x38	30x30	38x38	38x38
	40x40	38x38	40x40	40x40
	40x40	60x60	60x60	
			65x65	
			80x80	

