


# 50-806

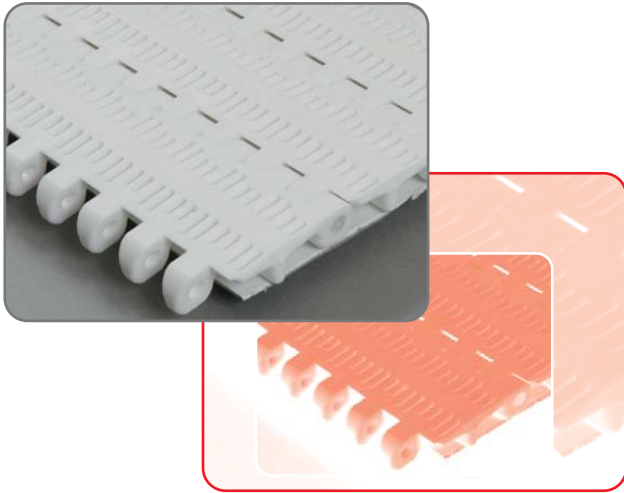

**Belt surface:** Open belt with a smooth surface.  
**Open area:** 20%. Biggest opening 2.5\*11 mm.  
**Strength:** The right belt for medium-heavy transportation.  
**Material/colour:** PE/nat, PP/white and grey. POM/blue.  
**Cleanability:** Excellent. FSIS  
**Accessories:** 3, 25, 50, 75 and 100 mm flights. 70 and 150 mm supported flights. Extended and bend flights. 50, 75, 100 and 150 mm side guards. Hold-down. Flights fitted with a 15 mm round top.  
**Application:** Medium-heavy duty transportation, Dairy, Vegetables, poultry, snacks, sweet goods and other industries that handle products requiring drainage and small opening.  
**Width interval:** 10 mm. e.g. 100 mm, 110 mm, 120 mm etc.

**EASY TO CLEAN**

**BELT DATA**

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	1200	8
Polypropylene (PP)	1400	8
Polyacetal (POM)	2060	12

**SPROCKET DATA**

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	117	103	84
8	154	140	121
10	178	164	145
12	211	197	178

**HUB SPECIFICATION**

Hub width 40 mm	Number of teeth			
	6Z	8Z	10Z	12Z
Round bore (mm)	25ø	25ø		
	30ø	30ø	30ø	30ø
	40ø	40ø	40ø	40ø
			50ø	50ø
			60ø	60ø
Square bore (mm)	38x38	30x30	38x38	38x38
	40x40	38x38	40x40	40x40
		40x40	60x60	60x60
				65x65
				80x80

