



50-908

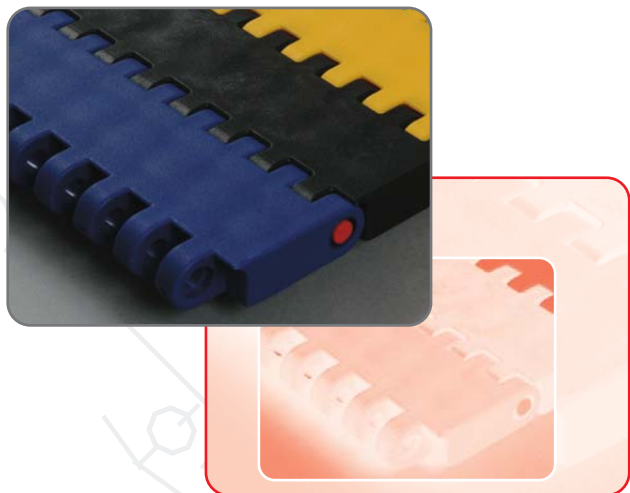

- Belt surface: Flat top.
- Open area: Closed
- Strength: The right belt for very-heavy applications.
- Material/colour: PP, POM/grey.
- Cleanability: Good
- Application: Very heavy transportation.
Assembling belt for cars.
Truck loading systems.
- Width interval: 20 mm. e.g. 100 mm, 120 mm, 140 mm etc.

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	4800	13
Polypropylene (PP)	6000	14
Polyacetal (POM)	10250	21



SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
12	210	191	172
18	307	288	269

HUB SPECIFICATION

Hub width 40 mm	Number of teeth	
	12Z	18Z
Round bore (mm)	60x60	60x60
	80x80	80x80
	90x90	90x90

