



# 50-600

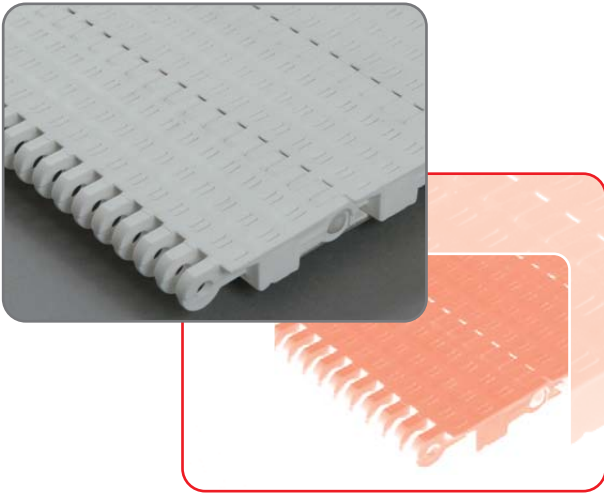

- Belt surface: Perforated flat top.
- Open area: 9%. Biggest opening 1 x 6 mm
- Strength: The right belt for medium-heavy transportation.
- Material/colour: PE/nat, PP/white and grey. POM/blue.
- Cleanability: Excellent. FSIS
- Accessories: 25, 50 and 75 mm flights. 50, 75, 100 and 150 mm side guards. Flights fitted with a round top.
- Application: Dairy, vegetables, poultry, snacks, sweet goods and other industries that handle products requiring drainage and very small openings.
- Width interval: 5 mm. e.g. 100 mm, 105 mm, 110 mm etc.

**BELT DATA**

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	1790	7
Polypropylene (PP)	2400	7
Polyacetal (POM)	3600	11

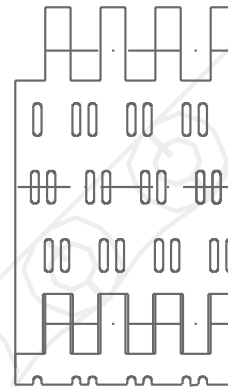

**SPROCKET DATA**

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	115	101	85
8	147	133	117
10	178	164	148
12	209	195	179
16	275	259	243

**HUB SPECIFICATION**

Hub width 40 mm	Number of teeth				
	6Z	8Z	10Z	12Z	16Z
Round bore (mm)	25ø	25ø			
	30ø	30ø	30ø	30ø	
	40ø	40ø	40ø	40ø	
			50ø	50ø	
			60ø	60ø	60ø
			80ø	80ø	80ø
Square bore (mm)	38x38	30x30	38x38	38x38	40x40
	40x40	38x38	40x40	40x40	50x50
		40x40	60x60	60x60	60x60
				65x65	65x65
				80x80	80x80

