


50-608

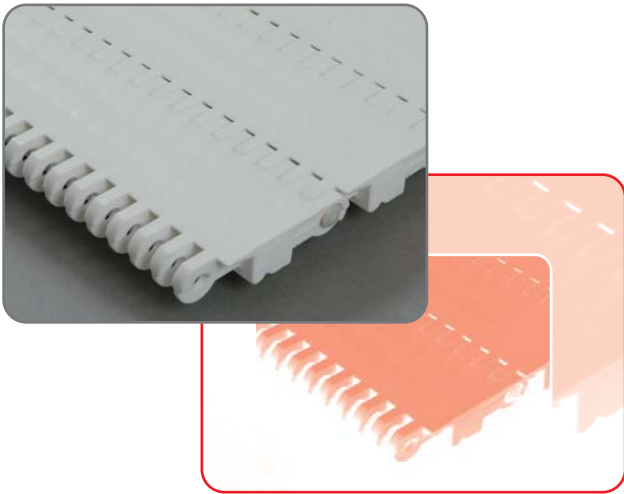


Belt surface: Flat top.
 Open area: Closed.
 Strength: The right belt for medium-heavy transportation.
 Material/colour: PE/nat, PP/white and grey. POM/blue.
 Cleanability: Excellent. FSIS
 Accessories: 25, 50, 75 and 100 mm high flights. Friction modules and hold-down.
 50, 75, 100 and 150 mm side guards.
 Extended and bent flights.
 Application: Dairy, vegetables, poultry, snack food, sweet goods and other industries that handle small products.
 Width interval: 5 mm. e.g. 100 mm, 105 mm, 110 mm etc.

BELT DATA

| Materials | Max. belt pull kg/m of width | Belt weight kg/m ² |
|--------------------|---------------------------------|----------------------------------|
| Polyethylene (PE) | 1790 | 7 |
| Polypropylene (PP) | 2400 | 7 |
| Polyacetal (POM) | 3600 | 11 |

SPROCKET DATA

| No. of teeth Z | A=Outside diameter (mm) | B=Pitch diameter (mm) | C=Inside diameter (mm) |
|-------------------|----------------------------|--------------------------|---------------------------|
| 6 | 117 | 101 | 85 |
| 8 | 149 | 133 | 117 |
| 10 | 180 | 164 | 148 |
| 12 | 211 | 195 | 179 |
| 16 | 275 | 259 | 243 |

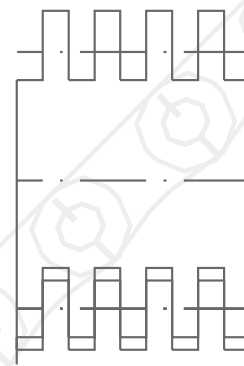

HUB SPECIFICATION

| Hub width 40 mm | Number of teeth | | | | |
|--------------------|-----------------|-------|-------|-------|-------|
| | 6Z | 8Z | 10Z | 12Z | 16Z |
| Round bore (mm) | 25ø | 25ø | 30ø | 30ø | |
| | 30ø | 30ø | 40ø | 40ø | |
| | 40ø | 40ø | 50ø | 50ø | 60ø |
| | | | 60ø | 60ø | 80ø |
| Square bore (mm) | 38x38 | 30x30 | 38x38 | 38x38 | 40x40 |
| | 40x40 | 38x38 | 40x40 | 40x40 | 50x50 |
| | | 40x40 | 60x60 | 60x60 | 60x60 |
| | | | | 65x65 | 65x65 |
| | | | | 80x80 | 80x80 |
| | | | | | |

