



S-100

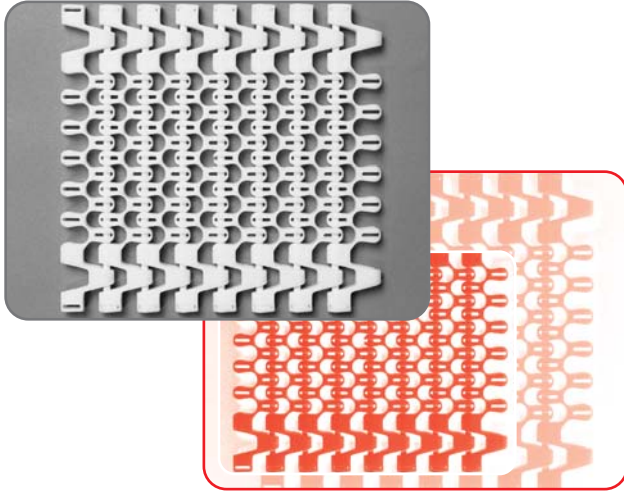

Belt surface: Smooth.
 Open area: 52 %
 Strength: The ideal choice for medium weight
 Material/colour: POM/PP
 Cleanability: Good.
 Accessories: friction modules, hold-down and steel reinforcements. 25, 50, 75 mm flights, 25 mm side guards,
 Application: Spiral coolers, radius conveyors.
 Construction: Side modules, centre modules.
 Width interval: Normal 20 mm. e.g. 209 mm, 229 mm.
 Inner radius Collapse factor from 1,5.

BELT DATA

Belt Material	Rods	Max. belt pull kg	Belt weight kg/m ²
Polyacetal (POM)	PP	75	7
	Nylon	110	7
	Steel	150	12
Polypropylene (PP)	PP	60	4.5
	Nylon	90	4.5
	Steel	100	9.7
Steel reinforcements	Steel	350	12

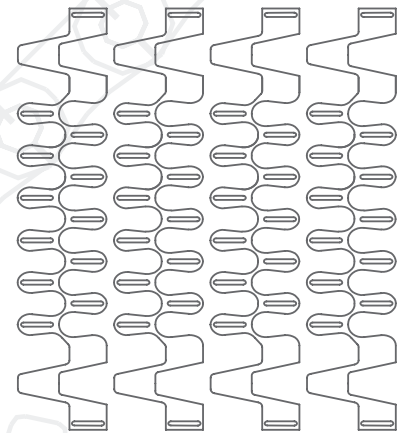

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)	Bore (mm)
8	78	66	54	ø20 - ø25 - 25x25 - 24x24x24hex
12	108	96	84	ø20 - ø25 - ø30 - ø40 - 25x25 - 40x40 - 1.5"x1.5"
20	173	161	149	ø25 - ø30 - ø40 - 25x25 - 40x40 - 1.5"x1.5"

