



25-420

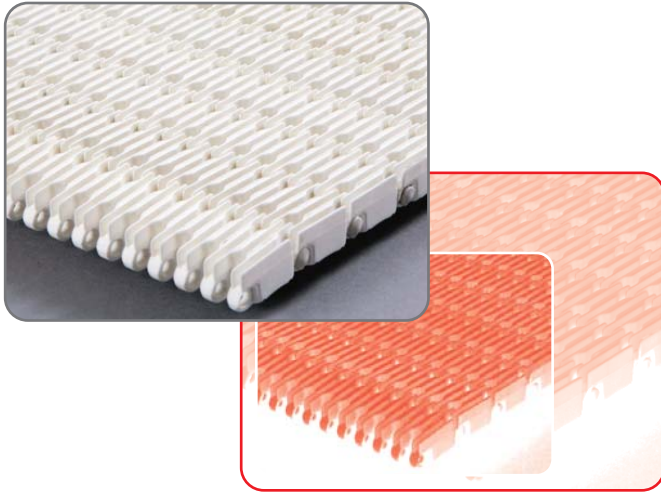

- Belt surface: Raised ribs - drained - for the use of finger transfer plates.
- Open area: 14%. Biggest opening 10 x 2 mm.
- Strength: Ideal for medium weight transportation.
- Material/colour: POM/blue/PP white.
- Cleanability: Excellent.
- Accessories: Finger transfer plates.
- Application: Transportation of small products, such as bottles, pasteurizer, cooler.
- Width interval: 10 mm. e.g. 100 mm, 110 mm, 120 mm etc.

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	900	8
Polypropylene (PP)	1200	8
Polyacetal (POM)	2400	11

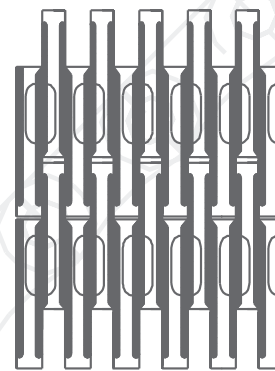

SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	64	45	36
8	80	61	52
12	114	95	86
20	179	160	151

HUB SPECIFICATION

Hub width 16 mm	Number of teeth			
	6Z	8Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø	25ø 30ø 40ø	25ø 30ø 40ø
	Hexagon bore (mm)	24x24x24		
	Square bore (mm)	25x25	25x25 40x40	25x25 40x40 60x60

